



TEST REPORT

According to ANSI/IES LM-80-15
For

Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China

Model: HL-EMC-5050D68W-B1C10-S1-HR3-Y

Report Type: 9000 Hours Test Report	Product Type: LED Package
Reviewed By:	Pote Wang <i>Pote Wang</i>
Report Number:	SZ2210730-31982E-10
Test Date:	2018-11-21 to 2019-12-21
Report Date:	2021-08-03
Approved by:	Blake Zhang / EE Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan). No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China. Tel: +86-0769-86858888 Fax:+86-0769-86858588

TABLE OF CONTENTS

1 - General Information	3
1.1 Description of LED Light Sources	3
1.2 Standards and Reference Documentations	4
1.3 Testing Equipment	4
1.4 Drive Level	4
1.5 Ambient Conditions for Maintenance Test	4
1.6 Photometric Measurement Method and Uncertainty.....	4
1.7 Statement of Traceability	4
1.8 Sample Set.....	5
2 - Summary of Test Result	6
3 - Test Data	7
3.1 Data Set 1, 85°C, 150mA (Lumen Maintenance).....	7
3.2 Data Set 1, 85°C, 150mA (Forward Voltage).....	8
3.3 Data Set 1, 85°C, 150mA (Chromaticity Shift)	9
3.4 Data Set 2, 105°C, 150mA (Lumen Maintenance)	10
3.5 Data Set 2, 105°C, 150mA (Forward Voltage).....	11
3.6 Data Set 2, 105°C, 150mA (Chromaticity Shift).....	12
4 - DUT Photo	13
4.1 Mechanical Dimensions	13
4.2 DUT Photo.....	13
Directions	14

1 - General Information

1.1 Description of LED Light Sources

Sample Size:

50 PCS test samples were in good condition and received on 2018-11-20. The samples were numbered from 1 to 25 and 26 to 50.

Manufacturer:	Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
Part Number:	HL-EMC-5050D68W-B1C10-S1-HR3-Y
Part Type:	LED Package
#Drive Level:	DC 150mA
#Nominal CCT:	3000K
#Power:	4.6W
#Average Current Density per LED die:	517.24mA/mm ²
#Average Power Density per LED die:	1.585W/mm ²
#CRI:	80
#Die Spacing:	0.2mm

Sampling Method:

LED samples for IESNA LM-80 testing consist of units built from a minimum of three manufacturing lots with each manufacturing lot built from different wafer lots built on non-consecutive days.

These manufacturing lots are picked to represent a wide parametric distribution.

Family products covered by this report:

According to *ENERGY STAR® Requirements for the Use of LM-80 Data*, the following products can be covered by this report base on the information and declaration provided by manufacturer. The information of these models shows that the covered products meet all section 4 requirements of *ENERGY STAR® Requirements for the Use of LM-80 Data* (September 28, 2017)

This report covers the following models:

Model name	CRI (typ.)	CCT (typ.)	Series	Parallel	Power density (W/mm ²)	Current density per LED die (mA/mm ²)	Current per die (mA)	Distance between of dies	Current (mA)
HL-EMC-5050D68W-B1C10-S1-HR3-Y	80	3000K	10	1	0.184	517.24	150	0.2	150
HL-EMC-5050D***W-B1C10-S1-HR3-Y-***	80	2700-6500K	10	1	0.184	517.24	150	0.2	150
HL-EMC-5050D***W-B1C8-S1-HR3-Y-***	80	2700-6500K	8	1	0.144	516.67	150	0.2	150
HL-EMC-5050D***W-B1C6-S1-HR3-Y-***	80	2700-6500K	6	1	0.108	516.67	150	0.2	150
HL-EMC-5050D***W-B4C2-S1-HR3-Y-***	80	2700-6500K	2	4	0.144	516.67	150	0.2	600
HL-EMC-5050D***W-B2C4-S1-HR3-Y-***	80	2700-6500K	4	2	0.144	516.67	150	0.2	300
HL-EMC-5050D***W-B1C9-S1-HR3-Y-***	80	2700-6500K	9	1	0.162	517.24	150	0.2	150
HL-EMC-5050D***W-B3C3-S1-HR3-Y-***	80	2700-6500K	3	3	0.162	517.24	150	0.2	450

The model name begins with "HL", such as "HL-EMC-5050D***W- B1C10-S1-HR3-Y-***" , "***" is described in detail as follows :

1. The first "****" is a number from 1 to 999 which stands for the brightness level.
2. The second "****" is the letter, which stands for the customer code.

Note:

1. The applicant Hongli Zhihui Group Co.,Ltd. Guangzhou Branch declare that their products with model HL-EMC-5050D68W-B1C10-S1-HR3-Y are the same to the products in report#R2DG181120070-10-9000 and is authorized by original applicant to use their test data.
2. All the data in previous report (R2DG181120070-10-9000) is shared in this report.

1.2 Standards and Reference Documentations

- ANSI/IES LM-80-15: IES Approved Method for Measuring Lumen Maintenance of LED Light Sources.
- CIE 127:2007: Measurement of LEDs
- ENERGY STAR[®] Requirements for the Use of LM-80 Data (This standard was not accredited by IAS)

1.3 Testing Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
0.5m integrating sphere	EVERFINE	AIS-2	G185304TA1381172	2019-10-22	2020-10-21
LED Test Source	EVERFINE	LTS-300	P185616CD1371113	2019-10-22	2020-10-21
High Accuracy Array Spectroradiometer	EVERFINE	HAAS-2000	P600674CM1381123	2019-10-22	2020-10-21
Standard Light Source	EVERFINE	D062	1011093	2019-11-19	2020-11-18
Multilayer aging machine	BACL	B2-270	20022	2019-03-11	2020-03-10
Digital CC&CV DC Power Supply	EVERFINE	WY5015	11090008	2019-03-06	2020-03-05

1.4 Drive Level

Samples are driven with a constant direct current (DC) during maintenance test, photometric and electrical measurement. The current value was regulated to within $\pm 3\%$ of the specified value of the manufacturer during maintenance test, and was within $\pm 0.5\%$ during photometric and electrical measurement test.

1.5 Ambient Conditions for Maintenance Test

For lumen maintenance test, samples within one data set, were installed on cooling boards in thermal chambers with minimal ambient airflow. The case temperature and ambient temperature was monitored by thermocouples which one was soldered to the coldest DUTs' case (TMP_{LED}) location, while the other is mounted at a distance of 5 mm above the TMP location.

During life testing, TMP_{LED} of the coldest LEDs were maintained at a temperature that was greater than or equal to 2°C below the corresponding nominal case temperature. Surrounding air was maintained at a temperature that was greater than or equal to 5°C below the corresponding nominal case temperature. Thermocouples were shielded from direct DUT optical radiation and comply with ASTM E230 Table 1 "Special Limits".

Samples were connected to DC power supply in series circuits with a constant current. The forward current was regulated to within $\pm 3\%$ of the specified value of the manufacturer.

The relative humidity within chamber was kept less than 65% during test.

For photometry measurement, the ambient temperature during test was set to 25°C \pm 2°C, RH <65%.

1.6 Photometric Measurement Method and Uncertainty

Integrating sphere and spectroradiometer is used to measure luminous flux and chromaticity coordinate u'v'. 2 π measurement was used and sample was driven by DC power supply. The forward current was regulated to within $\pm 0.5\%$ of the nominal value. The test system was calibrated by halogen reference lamp. The ambient temperature during test was set to 25°C \pm 2°C, RH <65%. The temperature measurement point was located in the sphere and the temperature was detected by a temperature probe.

The uncertainty of the light output measurements is U=1.59% (K=2), at the 95% confidence level. The uncertainty of the correlated color temperature measurements is U=21K (K=2), at the 95% confidence level.

The uncertainty of the temperature is U=0.8671°C (K=2), at the 95% confidence level.

1.7 Statement of Traceability

Bay Area Compliance Laboratories Corp. (Dongguan) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

1.8 Sample Set

Data Set 1: 85°C, 150mA

Part Number: HL-EMC-5050D68W-B1C10-S1-HR3-Y
Number of Units: 25
Case Temperature: >83°C
Ambient Temperature: >80°C
Life Test Drive Current: 150mA
Measurement Current: 150mA

Data Set 2: 105°C, 150mA

Part Number: HL-EMC-5050D68W-B1C10-S1-HR3-Y
Number of Units: 25
Case Temperature: >103°C
Ambient Temperature: >100°C
Life Test Drive Current: 150mA
Measurement Current: 150mA

2 - Summary of Test Result

Data Set:	Sample Size	Failures Observed:	Test Interval	Test Duration	α	β	Reported TM-21 L ₇₀ Lifetime
1	25	0	1000hrs	9000hrs	2.606E-06	1.000	>54000 hours
2	25	0	1000hrs	9000hrs	3.100E-06	0.999	>54000 hours


Average Lumen Maintenance (Percentage of Initial Luminous Flux)

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
1	100.01%	99.68%	99.32%	99.01%	98.71%	98.45%	98.19%	97.94%	97.73%
2	99.93%	99.54%	99.14%	98.75%	98.35%	98.03%	97.76%	97.48%	97.20%

Average Chromaticity Shift

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
1	0.0002	0.0003	0.0006	0.0008	0.0010	0.0012	0.0014	0.0018	0.0020
2	0.0002	0.0006	0.0009	0.0011	0.0014	0.0016	0.0019	0.0022	0.0024

Average Lumen Maintenance and Chromaticity Shift VS. Time

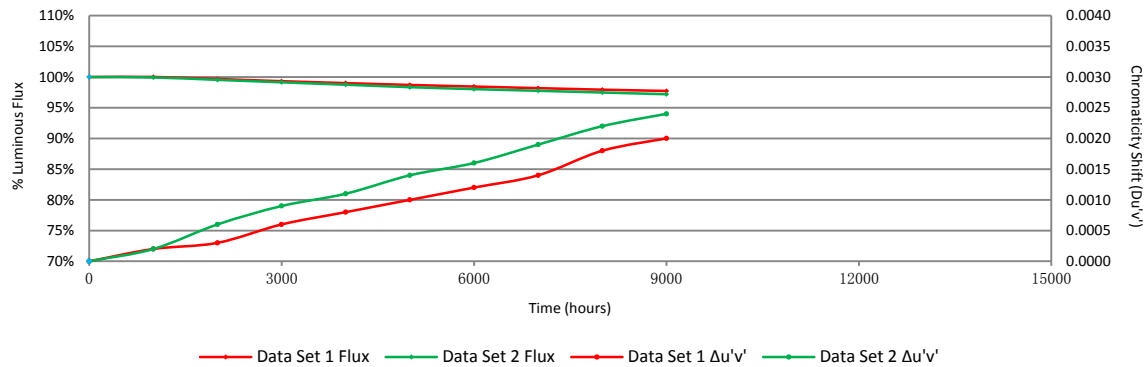

3 - Test Data

3.1 Data Set 1, 85°C, 150mA (Lumen Maintenance)

No.	Φ(lm)	Lumen Maintenance (%)								
	Ohr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
1	604.0	100.17	100.07	99.92	99.85	99.57	99.24	98.99	98.64	98.43
2	611.2	100.28	99.79	99.53	99.39	99.13	99.12	98.97	98.76	98.63
3	603.2	100.28	99.92	99.50	98.94	98.47	98.39	98.18	98.01	97.66
4	602.7	100.03	99.80	99.68	99.47	98.92	98.69	98.54	98.17	98.06
5	601.4	100.03	99.65	99.17	98.65	98.64	98.24	97.95	97.56	97.51
6	600.4	99.92	99.83	99.63	99.32	98.80	98.37	98.08	97.78	97.58
7	607.3	100.25	99.65	99.26	99.16	99.01	98.68	98.45	98.21	98.11
8	606.9	100.07	99.79	99.62	99.32	98.85	98.50	98.17	98.09	97.91
9	608.3	99.87	99.52	99.01	98.98	98.67	98.44	98.08	97.96	97.86
10	609.1	99.97	99.31	99.08	98.67	98.51	98.36	97.98	97.67	97.44
11	605.9	100.08	99.46	99.22	98.50	98.18	98.00	97.71	97.59	97.49
12	604.4	100.13	99.83	99.35	98.99	98.59	98.23	97.87	97.63	97.14
13	605.5	99.92	99.83	99.54	99.16	98.58	98.20	97.95	97.80	97.62
14	606.5	99.98	99.82	99.21	98.71	98.53	98.15	97.96	97.76	97.54
15	603.4	100.05	99.95	99.62	99.04	98.66	98.24	97.94	97.50	97.36
16	601.5	99.92	99.73	99.29	99.19	98.95	98.59	98.34	97.89	97.62
17	608.1	100.02	99.61	99.14	99.08	98.95	98.78	98.52	98.29	97.90
18	607.1	99.90	99.75	99.34	99.09	98.98	98.67	98.30	98.07	97.91
19	601.2	99.92	99.62	99.25	99.02	98.99	98.95	98.69	98.67	98.50
20	602.5	99.92	99.63	99.45	99.30	99.02	98.82	98.57	98.31	98.14
21	599.4	99.75	99.42	98.90	98.72	98.62	98.33	98.25	98.08	97.90
22	604.0	99.85	99.24	98.64	98.41	97.80	97.47	97.37	97.10	96.92
23	604.4	100.12	99.83	99.27	98.92	98.44	98.31	98.08	97.85	97.60
24	603.4	99.88	99.47	98.94	98.48	98.33	98.01	97.88	97.50	97.08
25	604.0	99.98	99.50	99.37	98.96	98.59	98.38	98.01	97.55	97.38
Avg.	604.6	100.01	99.68	99.32	99.01	98.71	98.45	98.19	97.94	97.73
Med.	604.0	99.98	99.73	99.29	99.02	98.66	98.38	98.08	97.89	97.62
st dev	2.9	0.14	0.20	0.28	0.34	0.35	0.38	0.38	0.40	0.43
Min.	599.4	99.75	99.24	98.64	98.41	97.80	97.47	97.37	97.10	96.92
Max.	611.2	100.28	100.07	99.92	99.85	99.57	99.24	98.99	98.76	98.63

3.2 Data Set 1, 85°C, 150mA (Forward Voltage)

No.	Forward Voltage (V)									
	Ohr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
1	24.13	24.16	24.14	24.14	24.13	24.13	24.24	24.17	24.16	24.17
2	24.19	24.20	24.17	24.17	24.16	24.16	24.20	24.19	24.18	24.21
3	24.12	24.15	24.13	24.13	24.14	24.12	24.17	24.16	24.14	24.17
4	24.02	24.05	24.03	24.04	24.03	24.02	24.09	24.05	24.04	24.07
5	24.08	24.12	24.11	24.11	24.10	24.09	24.13	24.12	24.12	24.14
6	24.06	24.08	24.07	24.08	24.06	24.06	24.12	24.09	24.11	24.12
7	24.15	24.17	24.16	24.17	24.14	24.14	24.20	24.17	24.16	24.19
8	24.04	24.07	24.06	24.06	24.04	24.05	24.12	24.07	24.07	24.10
9	24.09	24.13	24.11	24.12	24.10	24.10	24.16	24.14	24.12	24.16
10	24.10	24.14	24.12	24.14	24.11	24.12	24.15	24.13	24.12	24.15
11	24.11	24.15	24.14	24.14	24.13	24.11	24.17	24.16	24.13	24.16
12	24.06	24.10	24.08	24.11	24.09	24.07	24.13	24.11	24.09	24.12
13	24.04	24.08	24.07	24.08	24.07	24.05	24.10	24.09	24.07	24.11
14	24.08	24.11	24.09	24.12	24.10	24.09	24.15	24.12	24.11	24.13
15	24.11	24.14	24.14	24.14	24.13	24.12	24.17	24.16	24.14	24.17
16	24.11	24.14	24.13	24.14	24.13	24.12	24.18	24.15	24.13	24.16
17	24.01	24.04	24.04	24.04	24.03	24.02	24.06	24.06	24.03	24.06
18	24.04	24.07	24.08	24.08	24.06	24.05	24.10	24.06	24.07	24.10
19	24.08	24.12	24.13	24.11	24.12	24.10	24.14	24.13	24.11	24.15
20	24.02	24.05	24.06	24.05	24.05	24.03	24.09	24.07	24.06	24.09
21	24.07	24.11	24.11	24.11	24.09	24.09	24.14	24.13	24.10	24.13
22	24.05	24.07	24.09	24.07	24.07	24.05	24.11	24.10	24.08	24.10
23	24.09	24.13	24.13	24.12	24.12	24.11	24.16	24.14	24.13	24.15
24	24.10	24.13	24.13	24.13	24.11	24.09	24.16	24.13	24.12	24.14
25	24.11	24.14	24.14	24.14	24.13	24.11	24.16	24.16	24.13	24.17
Avg.	24.08	24.11	24.11	24.11	24.10	24.09	24.14	24.12	24.11	24.14
Med.	24.08	24.12	24.11	24.12	24.10	24.09	24.15	24.13	24.12	24.14
st dev	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
Min.	24.01	24.04	24.03	24.04	24.03	24.02	24.06	24.05	24.03	24.06
Max.	24.19	24.20	24.17	24.17	24.16	24.16	24.24	24.19	24.18	24.21

3.3 Data Set 1, 85°C, 150mA (Chromaticity Shift)

No.	u'	v'	CCT(K)	Chromaticity Shift ($\Delta u'v'$)								
				0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs
1	0.2481	0.5204	3069	0.0002	0.0001	0.0004	0.0007	0.0008	0.0012	0.0016	0.0017	0.0020
2	0.2474	0.5198	3090	0.0002	0.0001	0.0003	0.0005	0.0008	0.0009	0.0013	0.0015	0.0020
3	0.2473	0.5183	3103	0.0002	0.0004	0.0004	0.0006	0.0012	0.0015	0.0016	0.0019	0.0023
4	0.2481	0.5191	3077	0.0001	0.0003	0.0004	0.0006	0.0006	0.0008	0.0012	0.0015	0.0016
5	0.2472	0.5186	3106	0.0002	0.0008	0.0010	0.0009	0.0012	0.0016	0.0018	0.0021	0.0024
6	0.2477	0.5184	3094	0.0001	0.0004	0.0008	0.0008	0.0006	0.0007	0.0011	0.0025	0.0024
7	0.2471	0.5192	3104	0.0002	0.0006	0.0011	0.0010	0.0011	0.0014	0.0016	0.0019	0.0019
8	0.2484	0.5195	3067	0.0001	0.0001	0.0005	0.0007	0.0010	0.0013	0.0011	0.0017	0.0015
9	0.2476	0.5198	3086	0.0000	0.0003	0.0009	0.0010	0.0011	0.0011	0.0015	0.0019	0.0019
10	0.2465	0.5184	3124	0.0001	0.0005	0.0010	0.0012	0.0012	0.0013	0.0015	0.0018	0.0018
11	0.2483	0.5195	3069	0.0003	0.0006	0.0011	0.0013	0.0013	0.0013	0.0016	0.0019	0.0018
12	0.2485	0.5184	3072	0.0002	0.0003	0.0009	0.0010	0.0007	0.0007	0.0012	0.0015	0.0019
13	0.2470	0.5182	3113	0.0001	0.0005	0.0008	0.0012	0.0012	0.0012	0.0014	0.0019	0.0021
14	0.2477	0.5201	3080	0.0001	0.0000	0.0005	0.0008	0.0010	0.0010	0.0013	0.0016	0.0019
15	0.2480	0.5202	3072	0.0002	0.0001	0.0004	0.0007	0.0012	0.0013	0.0016	0.0018	0.0021
16	0.2475	0.5186	3096	0.0002	0.0001	0.0002	0.0005	0.0008	0.0009	0.0012	0.0014	0.0018
17	0.2470	0.5191	3107	0.0001	0.0004	0.0006	0.0009	0.0012	0.0014	0.0016	0.0020	0.0021
18	0.2480	0.5208	3068	0.0002	0.0001	0.0004	0.0007	0.0009	0.0013	0.0015	0.0017	0.0022
19	0.2482	0.5203	3066	0.0003	0.0003	0.0003	0.0009	0.0014	0.0015	0.0021	0.0024	0.0026
20	0.2471	0.5183	3108	0.0002	0.0001	0.0004	0.0005	0.0008	0.0011	0.0011	0.0015	0.0020
21	0.2473	0.5176	3109	0.0002	0.0005	0.0007	0.0010	0.0012	0.0013	0.0015	0.0017	0.0021
22	0.2471	0.5187	3106	0.0001	0.0004	0.0006	0.0008	0.0012	0.0014	0.0012	0.0019	0.0021
23	0.2469	0.5193	3106	0.0001	0.0003	0.0004	0.0006	0.0009	0.0011	0.0013	0.0016	0.0021
24	0.2490	0.5209	3042	0.0001	0.0005	0.0004	0.0007	0.0010	0.0010	0.0012	0.0016	0.0019
25	0.2481	0.5195	3075	0.0001	0.0002	0.0004	0.0008	0.0010	0.0012	0.0012	0.0017	0.0019
Avg.	0.2476	0.5192	3088	0.0002	0.0003	0.0006	0.0008	0.0010	0.0012	0.0014	0.0018	0.0020
Med.	0.2476	0.5192	3090	0.0002	0.0003	0.0005	0.0008	0.0010	0.0012	0.0014	0.0017	0.0020
st dev	0.0006	0.0009	20	0.0001	0.0002	0.0003	0.0002	0.0002	0.0002	0.0002	0.0003	0.0003
Min.	0.2465	0.5176	3042	0.0000	0.0000	0.0002	0.0005	0.0006	0.0007	0.0011	0.0014	0.0015
Max.	0.2490	0.5209	3124	0.0003	0.0008	0.0011	0.0013	0.0014	0.0016	0.0021	0.0025	0.0026

3.4 Data Set 2, 105°C, 150mA (Lumen Maintenance)

No.	Φ(lm)	Lumen Maintenance (%)								
	Ohr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
26	603.6	100.08	99.59	98.97	98.91	98.82	98.31	97.98	97.78	97.38
27	606.9	99.80	99.42	99.31	98.75	98.65	98.43	98.14	97.74	97.73
28	605.7	99.87	99.32	99.06	98.60	98.13	97.85	97.79	97.29	96.78
29	605.3	100.03	99.39	99.22	98.45	97.82	97.46	97.13	96.93	96.68
30	607.6	99.84	99.54	98.82	98.29	97.76	97.51	97.33	97.14	96.86
31	598.2	100.17	99.97	99.73	99.15	98.83	98.55	98.40	98.18	98.01
32	605.4	100.12	99.90	99.52	99.06	98.94	98.63	98.28	97.98	97.69
33	604.2	99.78	99.40	98.78	98.31	97.98	97.60	97.53	97.32	96.92
34	606.1	99.60	99.21	98.83	98.48	97.82	97.57	97.39	96.88	96.65
35	607.5	99.95	99.26	99.09	98.35	97.94	97.45	97.09	96.76	96.44
36	600.6	100.23	100.15	99.60	99.35	98.92	98.57	98.40	98.19	97.89
37	602.9	99.88	99.67	99.30	98.94	98.62	98.37	98.14	97.76	97.45
38	604.2	99.74	99.52	98.99	98.63	98.26	98.01	97.83	97.48	97.27
39	602.6	99.72	99.14	98.99	98.59	98.31	97.88	97.53	97.30	97.15
40	599.6	99.77	99.13	98.65	98.10	97.80	97.45	96.96	96.85	96.60
41	603.5	99.82	99.59	99.06	98.29	97.68	97.53	97.27	96.88	96.40
42	600.3	99.95	99.83	98.97	98.95	98.48	98.23	97.68	97.23	96.98
43	602.8	99.90	99.49	99.12	98.92	98.51	98.01	97.74	97.54	97.28
44	598.6	99.98	99.57	98.88	98.71	98.10	97.84	97.58	97.23	97.03
45	602.7	99.97	99.62	99.34	98.84	98.39	97.86	97.74	97.53	97.21
46	600.3	100.33	99.88	99.55	99.48	99.03	98.78	98.35	98.02	97.72
47	602.7	99.70	99.25	99.07	98.82	98.74	98.44	98.22	98.09	97.74
48	600.9	100.27	99.47	98.87	98.57	98.12	97.85	97.77	97.45	97.37
49	599.1	100.08	99.62	99.38	99.25	98.60	98.38	98.00	97.71	97.45
50	600.5	99.73	99.52	99.37	99.00	98.37	98.10	97.64	97.62	97.35
Avg.	602.9	99.93	99.54	99.14	98.75	98.35	98.03	97.76	97.48	97.20
Med.	602.8	99.90	99.52	99.07	98.75	98.37	98.01	97.74	97.48	97.27
st dev	2.8	0.19	0.26	0.28	0.36	0.42	0.42	0.42	0.43	0.46
Min.	598.2	99.60	99.13	98.65	98.10	97.68	97.45	96.96	96.76	96.40
Max.	607.6	100.33	100.15	99.73	99.48	99.03	98.78	98.40	98.19	98.01

3.5 Data Set 2, 105°C, 150mA (Forward Voltage)


No.	Forward Voltage (V)									
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
26	24.05	24.09	24.09	24.05	24.06	24.11	24.10	24.10	24.10	24.11
27	24.09	24.14	24.13	24.11	24.09	24.16	24.15	24.15	24.15	24.13
28	24.11	24.16	24.16	24.13	24.13	24.18	24.18	24.18	24.16	24.17
29	24.05	24.09	24.09	24.06	24.06	24.12	24.12	24.12	24.10	24.10
30	24.05	24.08	24.08	24.08	24.07	24.12	24.11	24.11	24.11	24.10
31	24.07	24.11	24.09	24.08	24.08	24.13	24.12	24.12	24.11	24.21
32	24.13	24.16	24.16	24.14	24.14	24.21	24.21	24.21	24.19	24.18
33	24.09	24.13	24.11	24.11	24.10	24.15	24.15	24.15	24.14	24.13
34	24.12	24.13	24.12	24.13	24.12	24.18	24.15	24.15	24.16	24.15
35	24.06	24.11	24.09	24.08	24.07	24.13	24.12	24.12	24.10	24.11
36	24.09	24.04	24.15	24.06	24.01	24.06	24.05	24.05	24.04	24.05
37	24.11	24.15	24.14	24.13	24.13	24.18	24.17	24.17	24.16	24.17
38	24.08	24.45	24.10	24.10	24.09	24.14	24.12	24.12	24.12	24.13
39	24.05	24.09	24.07	24.07	24.06	24.12	24.10	24.10	24.10	24.10
40	24.05	24.08	24.07	24.07	24.05	24.11	24.10	24.10	24.09	24.09
41	24.13	24.19	24.14	24.13	24.14	24.18	24.17	24.17	24.16	24.16
42	24.05	24.09	24.07	24.06	24.06	24.10	24.09	24.09	24.09	24.09
43	24.03	24.07	24.04	24.05	24.05	24.09	24.08	24.08	24.07	24.08
44	24.12	24.15	24.13	24.13	24.13	24.17	24.17	24.17	24.16	24.17
45	24.11	24.14	24.12	24.13	24.13	24.19	24.16	24.16	24.15	24.17
46	24.01	24.04	24.01	24.02	24.02	24.06	24.05	24.05	24.04	24.04
47	24.09	24.04	24.10	24.09	24.09	24.14	24.13	24.13	24.11	24.13
48	24.01	24.05	24.03	24.02	24.02	24.07	24.06	24.06	24.06	24.07
49	24.10	24.13	24.10	24.10	24.10	24.14	24.14	24.14	24.12	24.15
50	24.11	24.13	24.12	24.12	24.13	24.16	24.16	24.16	24.15	24.17
Avg.	24.08	24.17	24.10	24.09	24.09	24.14	24.13	24.13	24.12	24.13
Med.	24.09	24.11	24.10	24.09	24.09	24.14	24.12	24.12	24.11	24.13
st dev	0.04	0.08	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
Min.	24.01	24.04	24.01	24.02	24.01	24.06	24.05	24.05	24.04	24.04
Max.	24.13	24.45	24.16	24.14	24.14	24.21	24.21	24.21	24.19	24.21

3.6 Data Set 2, 105°C, 150mA (Chromaticity Shift)

No.	u'	v'	CCT(K)	Chromaticity Shift ($\Delta u'v'$)								
	Ohr(Initial)			1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
26	0.2484	0.5210	3057	0.0002	0.0003	0.0005	0.0008	0.0009	0.0011	0.0010	0.0015	0.0019
27	0.2479	0.5203	3073	0.0003	0.0008	0.0009	0.0011	0.0014	0.0016	0.0015	0.0020	0.0023
28	0.2483	0.5208	3060	0.0003	0.0005	0.0009	0.0008	0.0012	0.0014	0.0014	0.0017	0.0022
29	0.2473	0.5199	3092	0.0001	0.0005	0.0006	0.0009	0.0015	0.0017	0.0021	0.0021	0.0027
30	0.2482	0.5201	3069	0.0001	0.0006	0.0007	0.0008	0.0011	0.0013	0.0016	0.0016	0.0022
31	0.2491	0.5202	3045	0.0000	0.0007	0.0011	0.0013	0.0014	0.0019	0.0021	0.0022	0.0026
32	0.2474	0.5205	3086	0.0002	0.0004	0.0010	0.0012	0.0015	0.0014	0.0017	0.0017	0.0024
33	0.2480	0.5193	3079	0.0002	0.0004	0.0010	0.0010	0.0012	0.0015	0.0017	0.0017	0.0021
34	0.2482	0.5200	3068	0.0002	0.0009	0.0010	0.0009	0.0009	0.0013	0.0016	0.0023	0.0022
35	0.2482	0.5204	3066	0.0001	0.0004	0.0010	0.0010	0.0013	0.0014	0.0019	0.0023	0.0023
36	0.2473	0.5176	3108	0.0003	0.0010	0.0014	0.0015	0.0012	0.0013	0.0014	0.0020	0.0021
37	0.2470	0.5195	3103	0.0001	0.0007	0.0013	0.0017	0.0018	0.0018	0.0018	0.0025	0.0024
38	0.2467	0.5183	3119	0.0000	0.0006	0.0008	0.0012	0.0014	0.0014	0.0015	0.0021	0.0021
39	0.2486	0.5192	3063	0.0001	0.0007	0.0010	0.0016	0.0017	0.0019	0.0020	0.0023	0.0025
40	0.2465	0.5170	3135	0.0000	0.0007	0.0011	0.0015	0.0017	0.0019	0.0022	0.0021	0.0024
41	0.2473	0.5201	3092	0.0002	0.0006	0.0015	0.0019	0.0021	0.0023	0.0026	0.0026	0.0026
42	0.2473	0.5183	3103	0.0001	0.0002	0.0008	0.0017	0.0018	0.0021	0.0021	0.0023	0.0025
43	0.2478	0.5200	3080	0.0001	0.0002	0.0006	0.0011	0.0017	0.0019	0.0021	0.0023	0.0024
44	0.2484	0.5199	3064	0.0001	0.0003	0.0003	0.0007	0.0012	0.0017	0.0023	0.0024	0.0024
45	0.2481	0.5186	3082	0.0004	0.0005	0.0005	0.0007	0.0009	0.0016	0.0019	0.0023	0.0024
46	0.2474	0.5181	3104	0.0006	0.0004	0.0007	0.0009	0.0014	0.0016	0.0023	0.0025	0.0027
47	0.2470	0.5193	3104	0.0004	0.0005	0.0006	0.0009	0.0012	0.0015	0.0021	0.0023	0.0025
48	0.2483	0.5189	3073	0.0003	0.0004	0.0008	0.0010	0.0016	0.0018	0.0023	0.0027	0.0026
49	0.2490	0.5197	3051	0.0002	0.0010	0.0006	0.0007	0.0010	0.0013	0.0019	0.0020	0.0021
50	0.2469	0.5190	3110	0.0002	0.0006	0.0008	0.0008	0.0014	0.0017	0.0024	0.0024	0.0025
Avg.	0.2478	0.5194	3083	0.0002	0.0006	0.0009	0.0011	0.0014	0.0016	0.0019	0.0022	0.0024
Med.	0.2479	0.5197	3080	0.0002	0.0005	0.0008	0.0010	0.0014	0.0016	0.0019	0.0023	0.0024
st dev	0.0007	0.0010	23	0.0001	0.0002	0.0003	0.0004	0.0003	0.0003	0.0004	0.0003	0.0002
Min.	0.2465	0.5170	3045	0.0000	0.0002	0.0003	0.0007	0.0009	0.0011	0.0010	0.0015	0.0019
Max.	0.2491	0.5210	3135	0.0006	0.0010	0.0015	0.0019	0.0021	0.0023	0.0026	0.0027	0.0027


4 - DUT Photo

4.1 Mechanical Dimensions

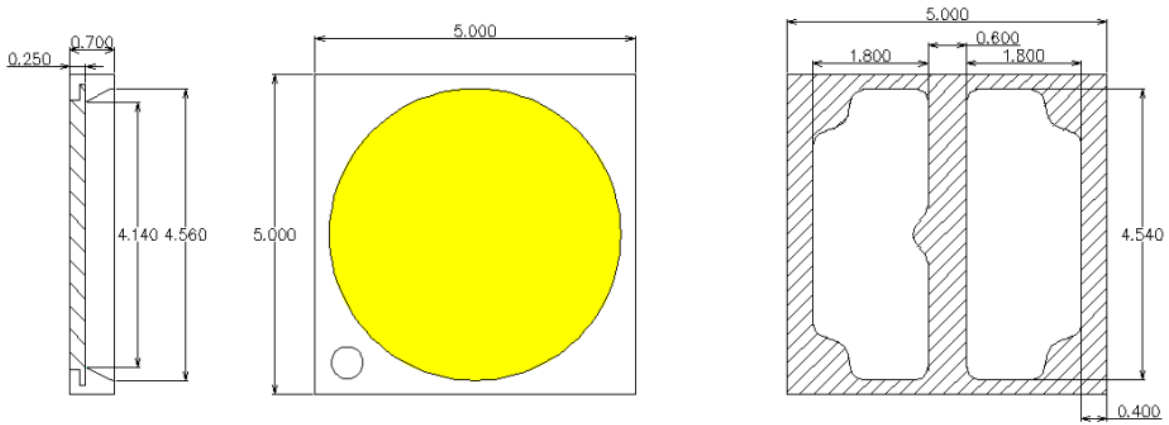

All dimensions are in millimeter

4.2 DUT Photo

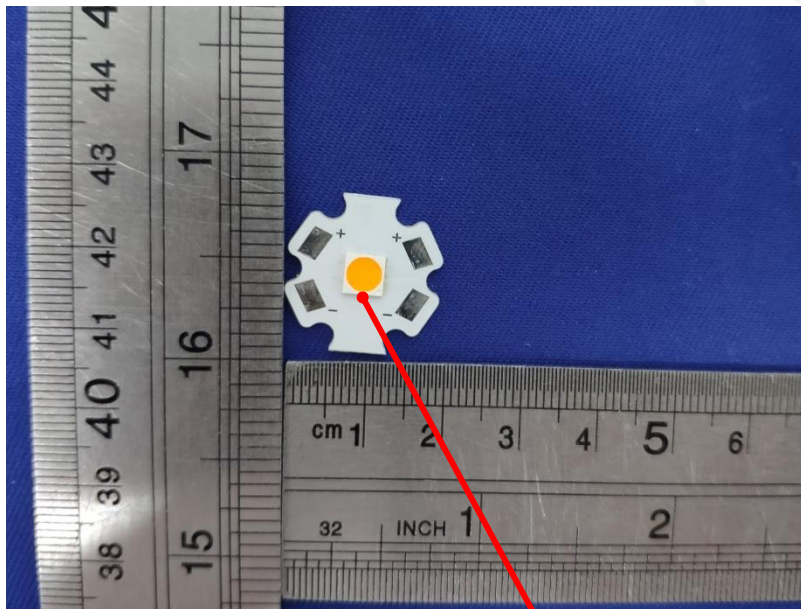

TMP_{LED}

Directions

1. The information marked “superscript #” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

*****END OF REPORT*****